




LucaLight T2 Series

Linear Asymmetric



general information

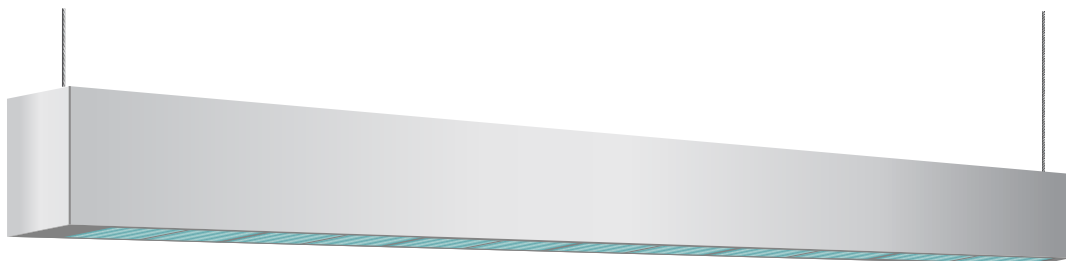

applications

- Office
- Corridor
- Retail
- Grocery
- Library


description

The L5 Aisle fixture is a luminaire designed specifically for applications such as aisles and corridors, where the main illumination is on the adjacent vertical surfaces while still providing light under the luminaire. Our L5 fixture comes in a variety of lumen outputs and can be cable suspended or hard mounted to a ceiling or structural element.




profile



1.75" x 4"

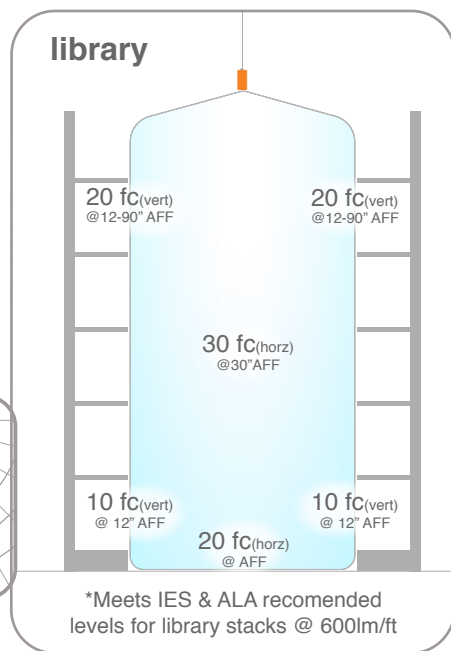

beam



1.75" x 4"

view of lens side of a 24" fixture



specifications

source solid state (LED)
 power 110-277V
 dimmable 0-10v
 efficacy fixture @ ~80lm/w
 output 100 to 1000 lm/ft
 wattage (lm/ft)x(ft)÷(80lm/w)
 life TM-21 (in progress)
 dimensions ... 1¼" x 4" x length
 material extruded aluminum
 finish powdercoat
 warranty 5 years
 certification cULus 1598

ordering

| T2 | configuration | | | physical | | | optical | | | |
|----|---------------|---------|-----------|----------|--------|--------|----------|----------|------|-----|
| | type | beam | direction | length | mount | finish | CCT | lumen/ft | SDCM | CRI |
| T2 | Aisle | Up | 18 | Pendent | Silver | 2700°K | 100 600 | 3-step | 70 | |
| | Grazer | Side | 24 | Top | Black | 3000°K | 200 700 | 5-step | 80 | |
| | Ceiling | Down | 30 | Side | White | 3500°K | 300 800 | | 90 | |
| | Wide | +Adjust | 36 | Bottom | Other | 4100°K | 400 900 | | | |
| | | | 42 | | | 5400°K | 500 1000 | | | |
| | | | 48 | | | | | | | |

see mounting sheet for a variety of options

